

## Installing the Ettus Research<sup>™</sup> GPSDO Kit for USRP<sup>™</sup> N200 Series


### Kit Contents:

- 1 GPSDO module
- 1 Power cable (2 wires)
- 1 RS-232 cable, 11.4cm (3 wires)
- 2 SMB right angle to SMA right angle cables
- 1 MMCX to SMA-Bulkhead cable
- 2 Screws

***Important: Please make all connections with the USRP powered OFF.***

### GPSDO Connectors:

- A. RS-232 (Pins: 1. TX, 2. GND, 3. RX)
- B. 1 PPS
- C. 10 MHz Ref Clock
- D. Power (Pins: 1. GND, 2. GND, 3. VDD)
- E. GPS Antenna

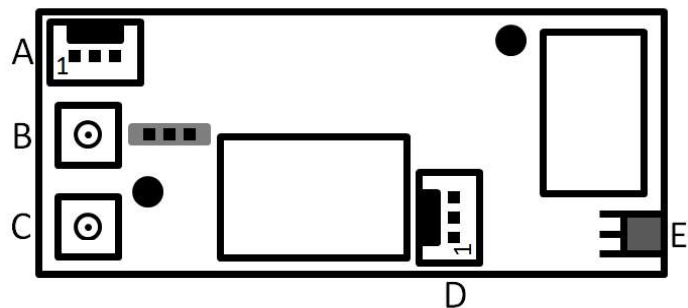

### Instructions:

1. Remove the daughterboard from the USRP motherboard if present.
2. Move J510 jumper on the motherboard from 1-2 to 2-3 in order to switch from external 10 MHz Ref Clock to GPSDO's 10 MHz Ref Clock
3. Screw the GPSDO module in place with the screws provided. The screws are treated to avoid loosening with vibration.
4. Connect the GPSDO power cable to J509 (N200) on the motherboard, and then to connector D on the GPSDO module
5. Connect an SMB to SMA cable between connectors B and J506 (N200 -PPS2)
6. Connect an SMB to SMA cable between connectors C and J507 (CLK REF2)
7. **USRP N2xx Rev 4 or higher:** Locate J312 on the back of the motherboard near the GPSDO power connector and connect either end of the 11.4cm long cable to it.
8. Connect the other end of the serial cable to connector A on the GPSDO module. Ensure the black wire is connected to pin 2, if not it is either the wrong cable or connected backwards.
9. Remove the washer and nut from the MMCX to SMA-Bulkhead cable. Connect it to connector E and then insert SMA-Bulkhead connector through the hole in the rear panel. Tighten nut to fasten in place.
10. Replace the daughterboard pushing all the cables underneath.



NI  
 11500 N. Mopac Expwy  
 Austin, TX 78759-3504  
 USA  
 P: +1-800-433-3488  
 ni.com

### Module Specifications

1 PPS Accuracy	±50ns to UTC RMS (1-Sigma) GPS Locked
Holdover Stability	<±11µs over 3 hour period at +25C
1 PPS Output (OCXO Flywheel Generated)	3.3VDC CMOS
RS-232 Control	NMEA & SCPI-99 Control Commands, Integrated into UHD
GPS Frequency	L1, C/A 1574MHz
GPS Antenna	Active (3V compatible) or Passive
GPS Receiver	50 Channels, Mobile, WAAS, EGNOS, MSAS capable
Sensitivity	Acquisition -144dBm, Tracking -160dBm
TTF	Cold Start: <45 sec, Warm Start: 1 sec, Hot Start: 1 sec
ADEV	1E-11 at 1s
Warm Up Time / Stabilization Time	<5 min at +25C to 1E-08 Accuracy
Supply Voltage (Vdd)	8.0V to 14.0 VDC (12 VDC Nominal)
Power Consumption	<1.8W Max, 1.35W Typical
Operating Temperature	0C to +60C
Storage Temperature	-45C to 85C

### Oscillator Specifications

Frequency Output	10MHz	
10MHz Retrace	±2E-08 after 1 hour at 25C	
Frequency Stability Over Temperature (Unlock Condition)	±2.5E-08	
Warm Up Time	< 1 min at +25C	
Phase Noise at 10MHz	1Hz	-80dBc/Hz
	10Hz	-110dBc/Hz
	100Hz	-135dBc/Hz
	1kHz	-145dBc/Hz
	10kHz	<-145dBc/Hz

Note: If your USRP model or revision is missing, please check online for an updated version of this document at : <https://www.ettus.com/product/details/GPSDO-KIT>